


Indoor Grilles

Fixed mesh grilles



AC 123 - Aluminium



SC 125 - Steel

Advantages

- Aesthetic, "mesh" type design for air exhaust.

APPLICATION

- Air exhaust for all ventilation and air-conditioning applications.
- Wall mounted.

DESCRIPTION

- Meshed grille with 12 x 12 x 0.4 mm squares (AC 123) or perforated sheet with 45 % free surface area (SC 125).
- AC models: finish - aluminium, desired RAL colour.
- SC models: white epoxy painted steel finish, RAL 9010 tint.
- Hidden fixings using friction clips.

STANDARD SUPPLY

- RAL 9010. Other RAL colours available upon request.
- Fixing F3 clips.


ACCESSORIES

- Opposed blade damper (OBD) - aluminum profiles. Fitted to the grille using clips.
- MT and ME connection plenums in galvanised sheet steel with rear or side mounted connection. See plenum dimensions on page 217.


ADDITIONAL RANGE

- Other sizes available upon request.


DIMENSIONS (mm)

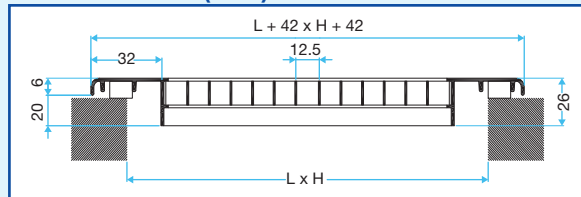


AC 123



AC 123 B

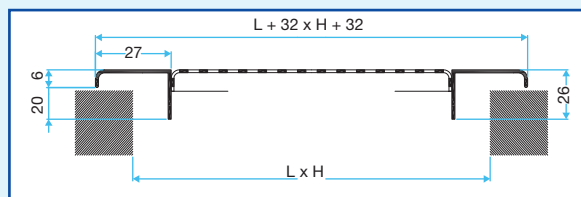

SC 125



SC 125 B

Comfort airflow levels for Lw < NR 25 and dimensions

L (mm)	H (mm)	Ø plenum (mm)	Airflow (m³/hr) for AC 123	Airflow (m³/hr) for SC 125
200	100	80*	160	140
300	150	160	400	350
400	200	200	700	600
600	200	200	1200	900
300	300	250	700	600
500	300	315	1300	1100
600	300	250*	1500	1200
800	300	2 x 250*	1900	1600
600	600	355	2200	1800
1000	600	2 x 315	4000	

- All MT plenums are 83° models except those marked (*).
- See selection table on page 254.

RANGE R10

Dimensions	Aluminium grille AC 123 F3 Code	Opposed blade damper Code	ME F3 plenum side connection Code	MT F3 plenum back connection Code	Steel grille SC 125 F3 Code
200 x 100					11050011
300 x 150					11050012
400 x 200					11050013
600 x 200					11050014
300 x 300					11050015
500 x 300					11050016
600 x 300					11050017
800 x 300					11050018
600 x 600					11050019
1000 x 600					