

Ceiling grille

11022326

IN LINE 100

IN LINE is a quiet and discreet duct fan. Used for air supply and exhaust.



PRODUCT BENEFITS

- visually discreet: no fan in room,
- very quiet: as low as 27 dB(A),
- air supply or exhaust.

Principles of operation

IN LINE duct fans offer intermittent room ventilation, with forced extraction as needed. It is suited for short duct runs.

Product description

IN LINE is a short-run duct fan for air supply or exhaust, intermittent ventilation of any small room: bathroom, WC, utility room, cellar.

Fields of application

Multi-occupancy residential housing, Individual residential housing, Refurbishment

Installation

- installed inside duct,
- maximum duct run: 2 m,
- manual stop/start switch operation,
- fresh air brought into room via air inlet grille or door undercut.

Reference arguments

- Application:
 - Intermittent room ventilation,
 - Air supply or exhaust,
 - Forced and intermittent operation.
- Description:
 - Material: ABS,
 - Low-noise motor.

Main characteristics

- 3 diameters:
 - Ø 100 mm for rooms up to 7 m²,
 - Ø 125 mm for rooms from 7 to 12 m²,
 - Ø 150 mm for rooms over 12 m².
- manual operation: instant start/stop switch operation.
- Low-consumption motor with low noise level,
- thermal protection fuse,
- material: ABS

General data

Variants	Number of speeds	Type of motor
11022326	1	AC


Ceiling grille

11022326

IN LINE 100

Dimensional data

Variants	A (mm)	B (mm)	D (mm)	H (mm)	L (mm)	Ø (mm)	Weight (kg)
11022326	113	28	59	100	113	100	0,41

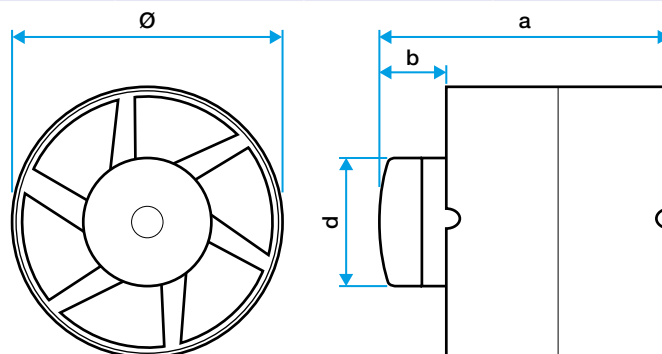

Airflow data

Variants	Max. airflow (m³/h)
11022326	75

Acoustic data

Variants	Sound pressure at 3 m (dB(A))
11022326	27


Electrical datas

Variants	Voltage (V)	Frequency (Hz)	Max. power	Protection current (A)
11022326	230	50	5,6	2

Regulatory data

Variants	Electrical insulation class
11022326	Class 2

Curve

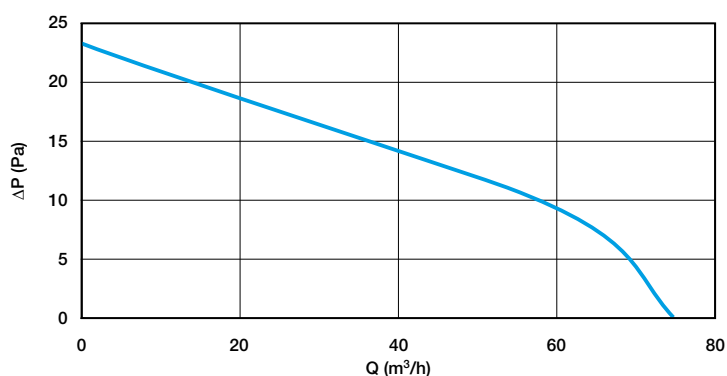

Ceiling grille

11022327

IN LINE 125

IN LINE is a quiet and discreet duct fan. Used for air supply and exhaust.



PRODUCT BENEFITS

- visually discreet: no fan in room,
- very quiet: as low as 27 dB(A),
- air supply or exhaust.

Principles of operation

IN LINE duct fans offer intermittent room ventilation, with forced extraction as needed. It is suited for short duct runs.

Product description

IN LINE is a short-run duct fan for air supply or exhaust, intermittent ventilation of any small room: bathroom, WC, utility room, cellar.

Fields of application

Multi-occupancy residential housing, Individual residential housing, Refurbishment

Installation

- installed inside duct,
- maximum duct run: 2 m,
- manual stop/start switch operation,
- fresh air brought into room via air inlet grille or door undercut.

Reference arguments

- Application:
 - Intermittent room ventilation,
 - Air supply or exhaust,
 - Forced and intermittent operation.
- Description:
 - Material: ABS,
 - Low-noise motor.

Main characteristics

- 3 diameters:
 - Ø 100 mm for rooms up to 7 m²,
 - Ø 125 mm for rooms from 7 to 12 m²,
 - Ø 150 mm for rooms over 12 m².
- manual operation: instant start/stop switch operation.
- Low-consumption motor with low noise level,
- thermal protection fuse,
- material: ABS

General data

Variants	Number of speeds	Type of motor
11022327	1	AC


Ceiling grille

11022327

IN LINE 125

Dimensional data

Variants	A (mm)	B (mm)	D (mm)	H (mm)	L (mm)	Ø (mm)	Weight (kg)
11022327	118	28	59	125	118	125	0,43

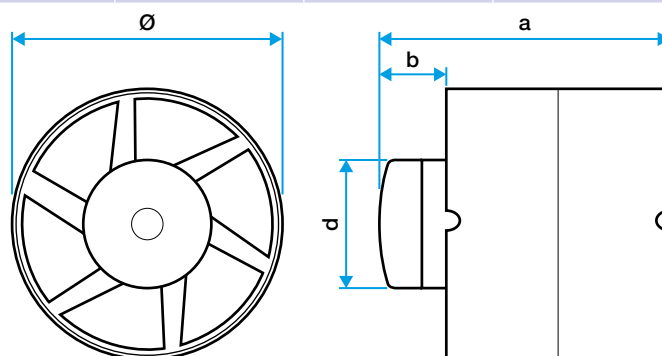

Airflow data

Variants	Max. airflow (m³/h)
11022327	135

Acoustic data

Variants	Sound pressure at 3 m (dB(A))
11022327	32


Electrical datas

Variants	Voltage (V)	Frequency (Hz)	Max. power	Protection current (A)
11022327	230	50	9,3	2

Regulatory data

Variants	Electrical insulation class
11022327	Class 2

Curve

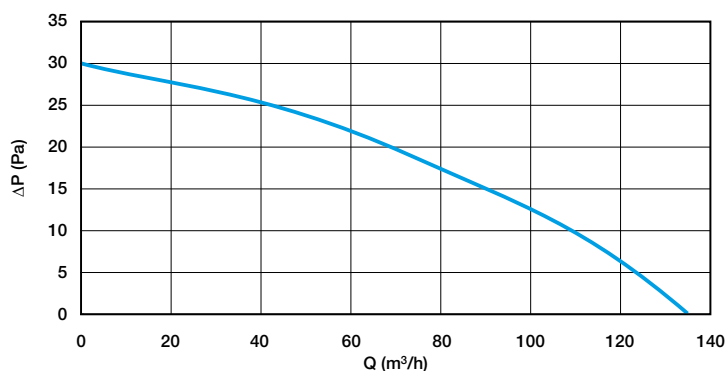

Ceiling grille

11022328

IN LINE 150

IN LINE is a quiet and discreet duct fan. Used for air supply and exhaust.



PRODUCT BENEFITS

- visually discreet: no fan in room,
- very quiet: as low as 27 dB(A),
- air supply or exhaust.

Principles of operation

IN LINE duct fans offer intermittent room ventilation, with forced extraction as needed. It is suited for short duct runs.

Product description

IN LINE is a short-run duct fan for air supply or exhaust, intermittent ventilation of any small room: bathroom, WC, utility room, cellar.

Fields of application

Multi-occupancy residential housing, Individual residential housing, Refurbishment

Installation

- installed inside duct,
- maximum duct run: 2 m,
- manual stop/start switch operation,
- fresh air brought into room via air inlet grille or door undercut.

Reference arguments

- Application:
 - Intermittent room ventilation,
 - Air supply or exhaust,
 - Forced and intermittent operation.
- Description:
 - Material: ABS,
 - Low-noise motor.

Main characteristics

- 3 diameters:
 - Ø 100 mm for rooms up to 7 m²,
 - Ø 125 mm for rooms from 7 to 12 m²,
 - Ø 150 mm for rooms over 12 m².
- manual operation: instant start/stop switch operation.
- Low-consumption motor with low noise level,
- thermal protection fuse,
- material: ABS

General data


Variants	Number of speeds	Type of motor
11022328	1	AC

Ceiling grille

11022328
IN LINE 150

Dimensional data

Variants	A (mm)	B (mm)	D (mm)	H (mm)	L (mm)	Ø (mm)	Weight (kg)
11022328	128	28	59	150	128	150	0,8

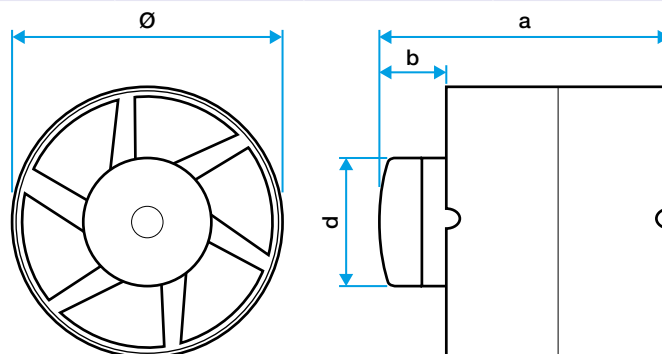

Airflow data

Variants	Max. airflow (m³/h)
11022328	250

Acoustic data

Variants	Sound pressure at 3 m (dB(A))
11022328	34

Electrical datas

Variants	Voltage (V)	Frequency (Hz)	Max. power	Protection current (A)
11022328	230	50	20	2

Regulatory data

Variants	Electrical insulation class
11022328	Class 2

Curve

