

Indoor Grilles

Single & double deflection grilles



AC 102 D - SC 102 D
Extruded aluminium or steel

APPLICATION

- Air supply and air exhaust for all ventilation and air-conditioning applications.
- Wall mounted.

DESCRIPTION

- AC 102: single deflection grille with vertical, mobile and individually adjustable blades, with a 20 mm spacing.
- AC 102 D: double deflection grille with front vertical and rear horizontal, mobile and individually adjustable blades, with a 20 mm spacing.
- AC 102 B: grille AC 102 with opposed blade damper (OBD).
- AC 102 BD: grille AC 102 D with opposed blade damper (OBD).

STANDARD SUPPLY

- RAL 9010. Other RAL colours available upon request.
- Fixing F3 clips.

ACCESSORIES

- Opposed blade damper (OBD) - aluminum profiles. Fitted to the grille using clips.
- MT and ME connection plenum, aluminium or galvanized sheet steel, with rear or side mounted connection. See plenum dimensions on page 217.


ADDITIONAL RANGE

- Other sizes available upon request.


Advantages

- Adjustable blades.
- Easy installation.


DIMENSIONS (mm)

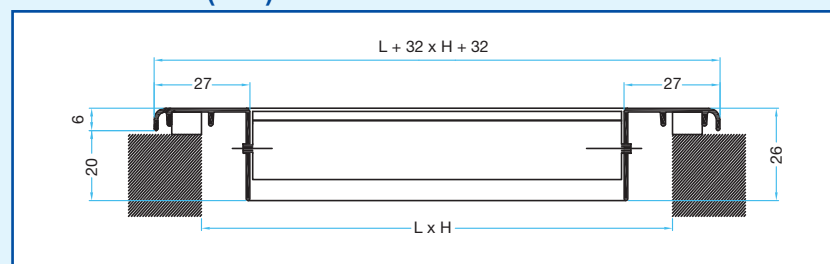


AC 102 grille



AC 102 D



AC 102 B



AC 102 BD

Comfort airflow in m³/hr for Lw < NR 25 and dimensions

L (mm)	H (mm)			
	100	150	200	300
200	200	-	-	-
250	250	370	-	-
300	300	450	-	-
400	400	700	800	-
500	500	800	1000	-
600	-	900	1200	1700
800	-	-	1500	2300
1000	-	-	-	2700

- See selection tables on pages 251 and 254.

RANGE R10

Dimensions	SD Grille AC 102 F3 Code	DD Grille AC 102 D F3 Code	DD Grille SC 102 D F3 Code
200 x 100			11050060
250 x 100			11050061
300 x 100			11050062
400 x 100			11050063
500 x 100			11050064
250 x 150			11050065
300 x 150			11050066
400 x 150			11050067
500 x 150			11050068
600 x 150			11050069
400 x 200			11050070
500 x 200			11050071
600 x 200			11050072
800 x 200			11050073
600 x 300			11050074
800 x 300			11050075
1000 x 300			11050076