

Indoor Grilles

Fixed blade grilles with filter



AC 161 W - Aluminium



AC 163 W - Aluminium

Advantages

- Front face opening on hinges for easy access to filter.
- RAL 9010 white finish.

APPLICATION

- Air exhaust for all ventilation and air-conditioning applications.
- Wall mounted.

DESCRIPTION

- AC 161: single deflection grille with horizontal fixed blades inclined at 40° with a 20 mm spacing. Housing for 25 mm thick filter. Front of the grille hinged - locked into position with a button screw.
- AC 163: square mesh 12 x 12 mm grille. Housing for 25 mm thick filter. Front of the grille hinged and locked into position with a button screw.
- Models AC 161 & AC 163: finish - extruded aluminium, natural satin finish.
- Hinges in stainless steel.
- Concealed fixing, using screws in the filter housing acting as a mounting frame.

STANDARD SUPPLY

- RAL 9010. Other RAL colours available upon request
- Fixing F3 clips.


ACCESSORIES

- Washable filter, code W.


ADDITIONAL RANGE

- Other sizes available upon request.

DIMENSIONS (mm)

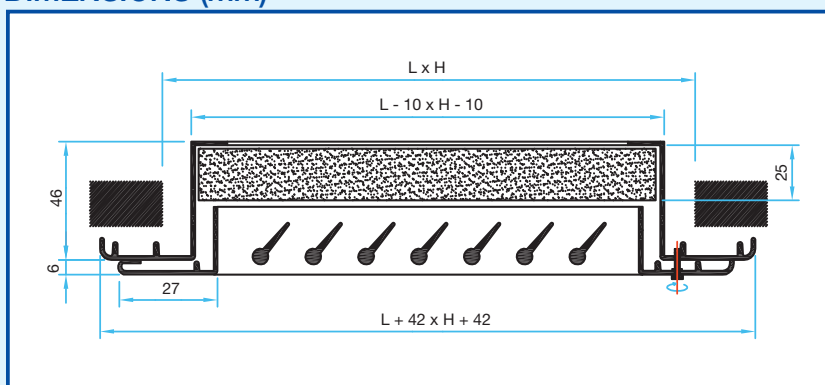

AC 161 grille with filter

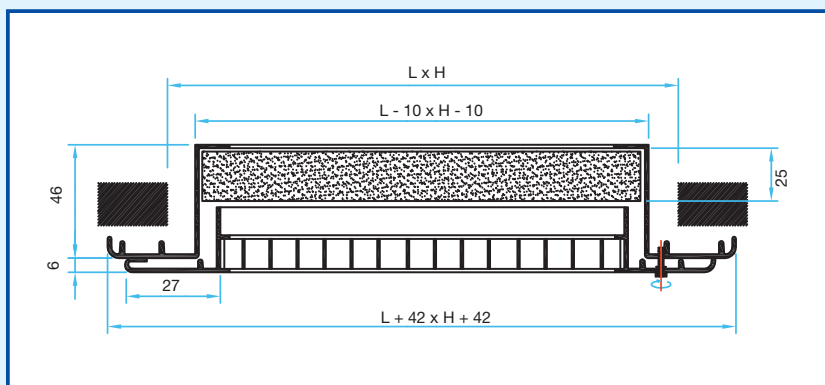

AC 163 grille with filter

Comfort airflow levels for Lw < NR 25 and dimensions

L x H (mm)	Standard filter (mm)	ØD Plenum (mm)	H Plenum (mm)	Airflow (m³/hr)
622 x 322	596 x 296	250	215	800
522 x 422	496 x 396	355	215	1600
622 x 422	596 x 396	355	215	1600
522 x 522	496 x 496	400	215	1800
622 x 522	596 x 496	450	215	2400

- See selection table on page 254.

RANGE

Dimensions	Vane grille AC 161 W F1 Code	Mesh grille AC 163 W F1 Code	Filters W Code	RT plenum back connection Code
622 x 322				
522 x 422				
622 x 422				
522 x 522				
622 x 522				